

HTCA-6400

High Availability Chassis 4U Telecom Network Appliance with 4 x86 CPU Blades and 2x Switch blades for redundancy, Storage blades with 10x NVMe SSD or Network blades



Features

- High availability, full redundancy and extreme high performance
- 4 compute blades in the rear, per blade supports up to dual Intel® Xeon® Scalable (Skylake-SP) CPUs and 16x DDR4 R-DIMM
- 2x switch blades in upper two slots for redundancy
- Storage blades with 10x NVMe SSD in bottom two slots or up to 4x Ethernet blades
- Up to 80 ports 10G SFP+ Ethernet ports
- N+N Redundant power supply and removable fan module
- NEBS compliant design

Preliminary Specifications

Compute Node

CPU Options	Intel® Xeon® Processor Scalable Family
Frequency	Depending on CPU
Core Number	Depending on CPU
BIOS	AMI SPI Flash BIOS
Chipset	Intel C627/C621 Chipset

Memory

Technology	Six-channel DDR4 (Registered)
Max. Capacity	512GB (Registered) per M/B tray
Socket	Up to 16 x 288-pin DIMM per M/B tray

Switch Blade

Switch Fabric	Broadcom Tomahawk BCM56960 or BCM56770
Speed	100/40/25/10Gbps per port
Interface	6 port 100GbE QSFP28 + 4 40GbE QSFP+ + 6 10GbE SFP+ 2 x 100GbE QSFP28 , 16 x 10/25GbE QSFP +, 4 x 10GbE RJ45 14*100GbE QSFP28

Ethernet Blade

Controller	XL710
Speed	10Gbps
Interface	Up to 20 x SFP+

Storage

Type	SATA III, 6Gb/s per port
Installation	8 x 2.5" swappable drive bays

I/O

Reset Button	Yes
Console	1 x RJ45
USB	1 x type A
IPMI	OPMA socket to support IPMI (IAC-AST2500)

Expansion

PCIe	N/A
PCI	N/A

Cooling

Processor	CPU heatsinks with fan duct
System	5 x hot-swappable cooling fan sets with smart fan control for each computing blade

Environment

Operating/Storage Temperature	0 ~ 40°C /-20 ~ 70°C
Relative Humidity	5% ~ 90%, non-condensing

Miscellaneous

LCD Module	2 x 20 characters
Watchdog	Yes
Internal RTC with Li Battery	Yes

Mechanical

Dimension (W x H x D)	438 x 177 x 685.8 mm
Weight	TBD
Mounting	Rack mount

Power

Type / Watts	AC 2000 watt N+N Redundant /each DC 1600 watt N+N Redundant /each PM bus support, up to 4 PSU slots
Input	AC 220~240V DC -36~-72V

OS Support

Linux	Linux Cent OS 7.2 or above
-------	----------------------------

Certification





EMC	CE Class A, FCC Class A
-----	-------------------------

■ Product I/O View



- A** LCM
- B** Console
- C** LOM port
- D** Storage blade
- E** Programmable Switch blades
- F** CPU blades
- G** N+N PSUs

■ Dimensions 438 x 177 x 685.8 mm

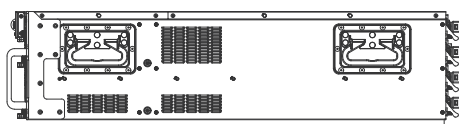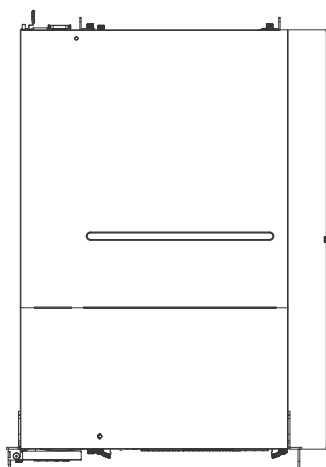

HTCA-6400A

■ Ordering Information

HTCA System	HTCA-6400B	HybridTCA high-performance chassis 4U telecom network appliance with 4 CPU blades with 8 x Intel® Xeon® Scalable processors + 8 bays for 2.5" HDDs with 4 I/O blades slots
Compute Node	HMB-6110	x86 compute node with 2 x Intel® Xeon® Processor Scalable Family
Switch Blade	HLM-1021	2 port 100GbE QSFP28 + 16 25/10GbE SFP28 + 4 10GbE RJ45
	HLM-1030	6 port 100GbE QSFP28 + 4 port 40GbE QSFP, 16x 10GbE SFP+
Ethernet Blade	HLM-1001	20 port 10GbE SFP+ Ethernet network interface blade
Storage Blade	HDM-1006	1U Storage Blade with 6x NVMe SSD Trays for HTCA-6000 Series