


# FW-7535

## Compact Desktop Network Appliance with Dual Core Intel Atom CPU and Six Network Ports

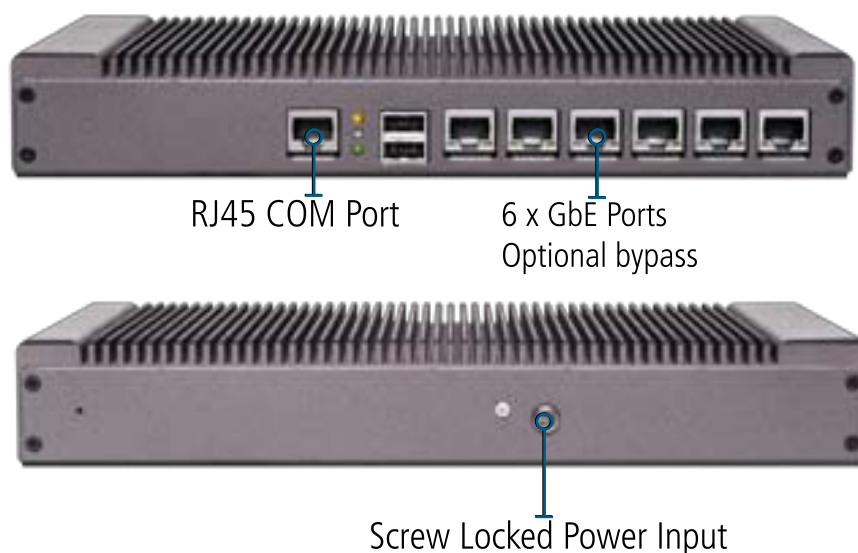

### Features

#### Environmentally Friendly and Cost Effective

The FW-7535 is built entirely with RoHS compliant parts and production processes. An embedded ultra-low voltage ATOM 1.66GHz CPU delivers power-efficient processing while the Intel ICH8M system logic provides PCI-E bus network bandwidth. The FW-7536 can be fitted with either the Intel Atom D410 or the D510; while both CPUs come with 1.66 GHz of processing power, the D410 is a single core and the D510 is a dual core.

#### Fanless Platform with Reduced Power Consumption

Measuring only 40 mm in height,


the FW-7535 can be deployed virtually anywhere. Its space-saving design offers flexibility and cost savings while maintaining the high throughput and availability required for network security, acceleration and other network applications. The FW-7535's low profile makes it a perfect solution for network applications where space is critical.

## Expansive I/O interface and Internal Storage

The FW-7535 includes an internal 2.5" HDD, CF Socket, USB 2.0 ports, Mini-PCle and console connection options; it also comes

with six integrated Ethernet ports with optional bypass and can be easily deployed in front-line security applications where reliability and availability are of key concern.

## Dimensions: 268 x 40 x 145 mm

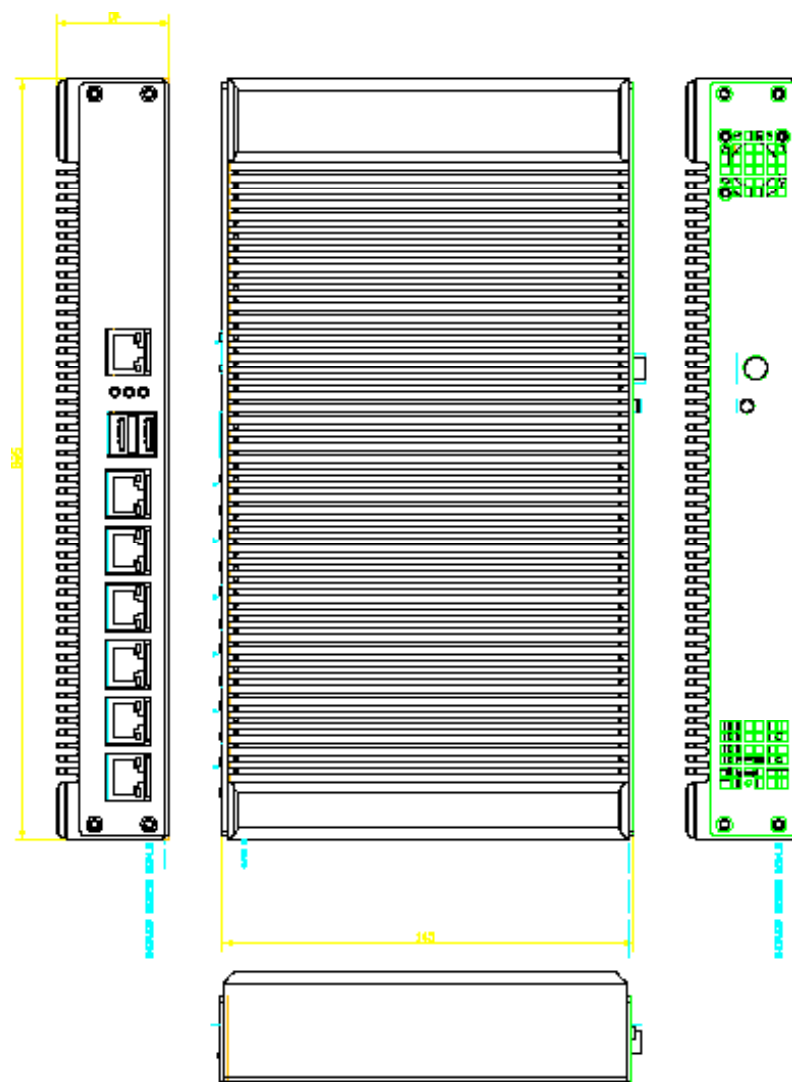



## Specifications

<b>Form Factor</b>		Desktop
<b>Platform</b>	Processor Options	Intel Atom D410 or Dual Core D510 onboard
	Chipset	Intel ICH8M
<b>BIOS</b>		AMI BIOS 16Mbit SPI Flash ROM
<b>System Memory</b>	Technology	DDR2 667/800 MHz
	Max. Capacity	4GB
	Socket	2 x 200P So-DIMM
<b>OS Support</b>		Windows 2000, 2003, XP, 7, Linux kernel 2.4 and up, OpenBSD, FreeBSD
<b>Storage</b>	HDD Bays	1 x 2.5"
	CompactFlash	1 x Type II CompactFlash
	Ethernet Ports	6 x GbE RJ45
	Bypass	1 pair G2
<b>Networking</b>	Controllers	1 x Intel 82574L 5 x Intel 82583V
	Ethernet Modules	N/A
	Management Port	N/A
	Security Acceleration	N/A
<b>I/O Interface</b>	Console	1 x RJ45
	USB	2 x USB 2.0
	IPMI via OPMA slot	N/A
<b>Expansion</b>	PCIe	1 x Mini-PCIe (with USB signal only)
	PCI	N/A
<b>Cooling</b>	Processor	CPU Passive Heatsink
	System	Optional cooling Fan
<b>Environmental Parameters</b>	Temperature, ambient operating / storage	0 ~ 40° C / -20~70° C
	Humidity (RH), ambient operating / ambient non-operating	5~95%, non-condensing
	LCD Module	N/A
<b>Miscellaneous</b>	Watchdog	Yes
	Internal RTC with Li Battery	Yes
<b>Physical Dimensions</b>	Dimensions (WxHxD)	268 x 40 x 145 mm
	Weight	1.2 kg
<b>Power</b>	Type / Watts	12V/5A 60W Power Adapter
	Input	AC 100~240V @50~60 Hz
<b>Approvals and Compliance</b>		CE emission, FCC Class A, RoHS, UL

## Ordering Information

FW-7535A	Pineview D-410 CPU 1.6GHz; w/ 2 x SODIMM slots, 1 pair bypass, desktop with fan
FW-7535B	Pineview D-510 CPU 1.6GHz; w/ 2 x SODIMM slot, 1 pair bypass, desktop with fan
FW-7535C	Pineview D-410 CPU 1.6GHz; w/ 2 x SODIMM slots, desktop with fan
FW-7535D	Pineview D-510 1.6GHz; w/ 2 x SO-DIMM slots, desktop with fan
FW-7535E	Pineview D-410 CPU 1.6GHz w/ 1 x SODIMM slot, 1 pair bypass, fanless
FW-7535F	Pineview D-510 CPU 1.6GHz; w/ 1 x SODIMM slot, 1 pair bypass, fanless
FW-7535G	Pineview D-410 CPU 1.6GHz; w/ 1x SODIMM slot, fanless
FW-7535H	Pineview D-510 CPU 1.6GHz; w/ 1x SODIMM slot, fanless